


ARIES Premium SLE
DownLight Engine

DESCRIPTION:

Perfectly suitable to replace traditional lights
Perfect heat reduction technology
Wide voltage range
The narrow colour tolerance
Quick wiring
Strong spring mechanism
3 years warranty time.
Certificates: CE, ROHS

Indoor Recessed Application

High Efficiency Lighting and Automation Solutions

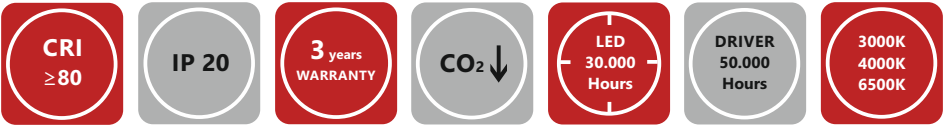

Article	Description	Lumen Output	System Power	Beam Angle	Body Color	Product Size	Package Qty.
404000001001***	DLC-002-0 ARIES PREMIUM 2,5"	415 Lm	3.95W	90°	White	ø100x35mm	20
404000001010***	DLC-002-0 ARIES PREMIUM 3,5"	625 Lm	5.9W	90°	White	ø118x35mm	20
404000001008***	DLC-002-0 ARIES PREMIUM 4"	750 Lm	6.9W	90°	White	ø144x35mm	20
404000001009***	DLC-002-0 ARIES PREMIUM 5"	1000 Lm	9W	90°	White	ø178x37mm	10
404000001003***	DLC-002-0 ARIES PREMIUM 6"	1730 Lm	16W	90°	White	ø191x40mm	10

Technical

High Efficient Constant Current Driver
Input Voltage: AC180-250V AC 50/60Hz
Power Factor: >0.95
LED Type: Mid-power chip with LM80
CRI: Ra≥80
Work temperature: -15°C+45°C
Material: Aluminum


Options

DALI, Touch-DIM, 1-10V, DSI control
Corridor Function application
Compatible Emergency Conversion Kit
CRI: Ra>90

LED Color Selection table

for WW 3000K, Pls. specify 030 at order.
for NW 4000K, Pls. specify 040 at order.
for CW 6500K, Pls. specify 065 at order.

Certificate



2.5": ø 70mm
3.5": ø 85mm
4": ø 120mm
5": ø 138mm
6": ø 175mm

Dimension

TECHNICAL NOTES:

Please contact us for different body colors or any special requests.
Please specify the colour temperatures of lighting, dotted the area in order.
Output lighting flux of LED lamp and power consumption of drivers may vary ± 5% because of the manufacturers values.