

RECTA Premium SLE



DownLight Engine

DESCRIPTION:

Perfectly suitable to replace traditional lights
 Perfect heat reduction technology
 Wide voltage range
 The narrow colour tolerance
 Quick wiring
 Strong spring mechanism
 3 years warranty time.
 Certificates: CE, ROHS

Indoor Recessed Application

High Efficiency Lighting and Automation Solutions

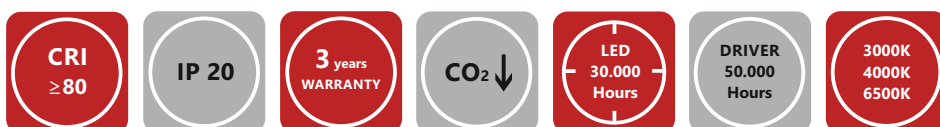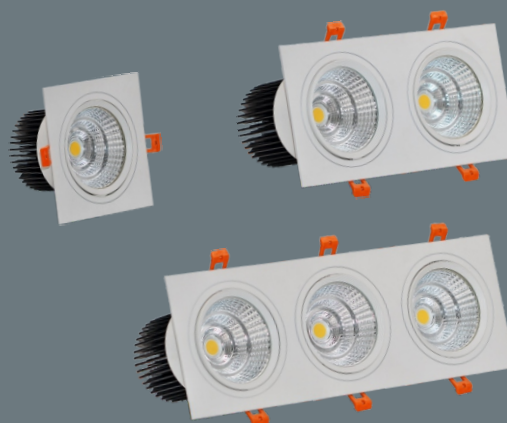

Article	Description	Lumen Output	System Power	Beam Angle	Body Color	Product Size	Package Qty.
404000015004***	DLR-001-1 RECTA PREMIUM 4"	3000 Lm	27W	90°	White	140x117x140mm	10
404000016005***	DLR-001-2 RECTA PREMIUM 4"	6000 Lm	54W	90°	White	140x117x275mm	10
404000017006***	DLR-001-3 RECTA PREMIUM 4"	9000 Lm	81W	90°	White	140x117x400mm	5

Technical

High Efficient Constant Current Driver
 Input Voltage: AC180-250V AC 50/60Hz
 Power Factor: >0.95
 LED Type: Mid-power chip with LM80
 CRI: Ra≥80
 Work temperature: -15°C+45°C
 Material: Aluminum

Options

DALI, Touch-DIM, 1-10V, DSI control
 Corridor Function application
 Compatible Emergency Conversion Kit
 CRI: Ra>90


LED Color Selection table

for WW 3000K, Pls. specify 030 at order.
 for NW 4000K, Pls. specify 040 at order.
 for CW 6500K, Pls. specify 065 at order.

Certificate



Dimension



TECHNICAL NOTES:

Please contact us for different body colors or any special requests.
 Please specify the colour temperatures of lighting, dotted the area in order.
 Output lighting flux of LED lamp and power consumption of drivers may vary ± 5% because of the manufacturers values.