

ROUND 303600006


Constant Current R60-3030-9 LED Module
6.2 Watt

DESCRIPTION:

- Aluminium PCB design.
- High efficiency.
- Low energy consumption.
- Narrow colour tolerance.
- No UV or infrared radiation.
- 3 years warranty time.
- Certificates: CE, ROHs.

For Indoor and Outdoor Applications

High Efficiency Lighting and Automation Solutions

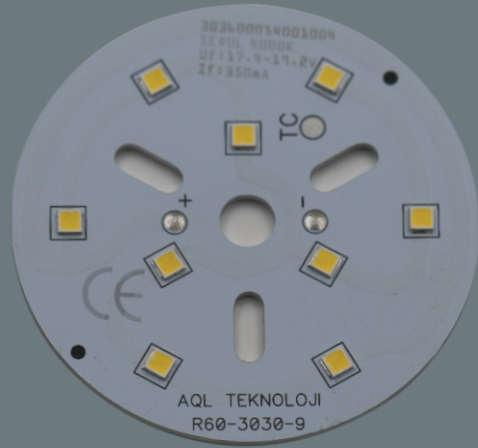

Module Dimensions	Size/Diameter	Material	Chip	LED	CRI	Serial	Parallel	Temperature Ambient Ta°C
R60-3030-9	Ø 60 mm	1.6 mm Alu	3030	9	≥80	3	3	-15°C+45°C

Code	Lumen Output			Voltage	CCT	Connection
	250mA	300mA	350mA			
303600006002009			769 Lm	17.4....19.2 Volt	2700 Kelvin	wiring
303600006002001			789 Lm	17.4....19.2 Volt	3000 Kelvin	wiring
303600006002002			869 Lm	17.4....19.2 Volt	4000 Kelvin	wiring
303600006002003			902 Lm	17.4....19.2 Volt	6500 Kelvin	wiring

TECHNICAL DRAWING

