

ROUND 303600005


Constant Current R105-3030-20 LED Module
10.2...15 Watt

DESCRIPTION:

- Aluminium PCB design.
- High efficiency.
- Low energy consumption.
- Narrow colour tolerance.
- No UV or infrared radiation.
- 3 years warranty time.
- Certificates: CE, ROHs.

For Indoor and Outdoor Applications



High Efficiency Lighting and Automation Solutions

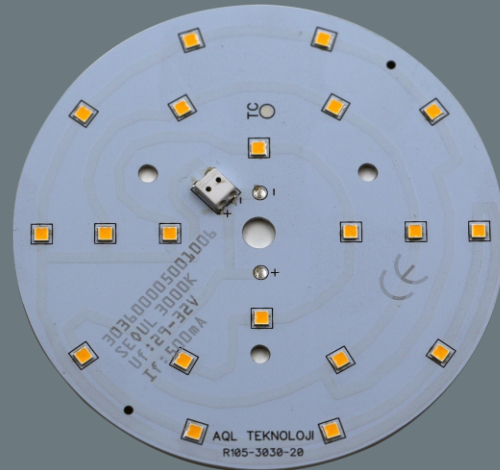

Module Dimensions	Size/Diameter	Material	Chip	LED	CRI	Serial	Parallel	Temperature Ambient Ta°C
R105-3030-20	Ø 105 mm	1.6 mm Alu	3030	20	≥80	5	4	-15°C+45°C

Code	Lumen Output			Voltage	CCT	Connection
	350mA	500mA	700mA			
303600005002009	1409 Lm	1849 Lm		29....32 Volt	2700 Kelvin	wiring
303600005002001	1445 Lm	1885 Lm		29....32 Volt	3000 Kelvin	wiring
303600005002002	1589 Lm	2262 Lm		29....32 Volt	4000 Kelvin	wiring
303600005002003	1597 Lm	2163 Lm		29....32 Volt	6500 Kelvin	wiring

TECHNICAL DRAWING

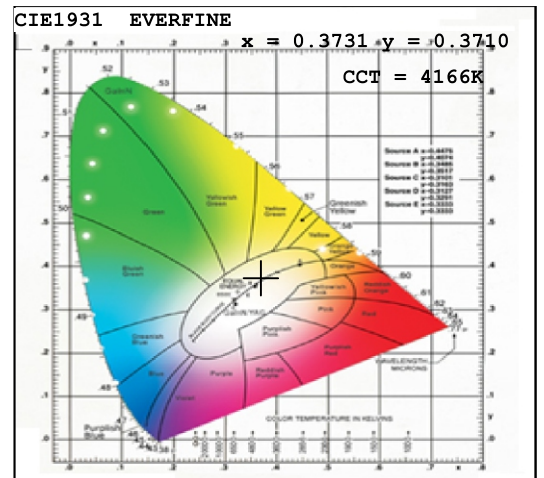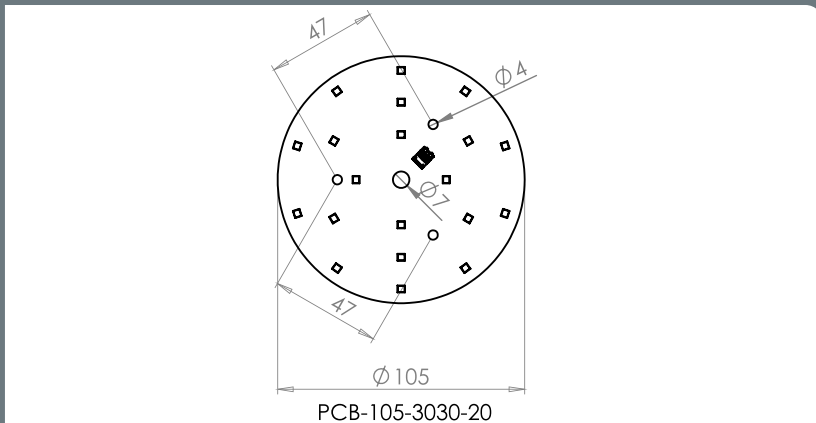

CIE1931 Chromaticity Diagram

