

# ROUND 303600012


**Constant Current R80-3030-9 LED Module  
6.2 Watt**

**DESCRIPTION:**

- Aluminium PCB design.
- High efficiency.
- Low energy consumption.
- Narrow colour tolerance.
- No UV or infrared radiation.
- 3 years warranty time.
- Certificates: CE, ROHs.

For Indoor and Outdoor Applications


High Efficiency Lighting and Automation Solutions

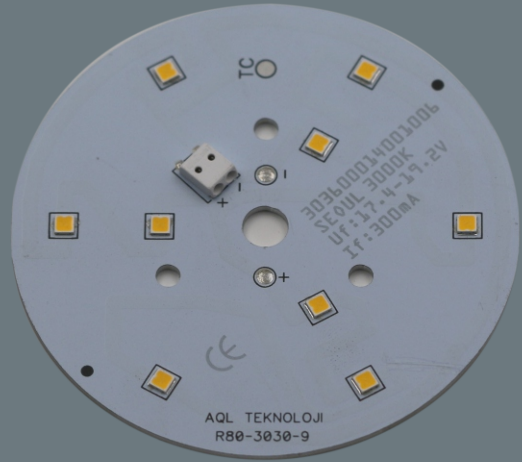


Module Dimensions	Size/Diameter	Material	Chip	LED	CRI	Serial	Parallel	Temperature Ambient Ta°C
R80-3030-9	Ø 80 mm	1.6 mm Alu	3030	9	≥80	3	3	-15°C ....+45°C

Code	Lumen Output			Voltage	CCT	Connection
	250mA	300mA	350mA			
303600012002001		720 Lm	812 Lm	17.4....19.2 Volt	3000 Kelvin	wiring
303600012002002		908 Lm	927 Lm	17.4....19.2 Volt	4000 Kelvin	wiring
303600012002003		815 Lm	890 Lm	17.4....19.2 Volt	6500 Kelvin	wiring

## TECHNICAL DRAWING

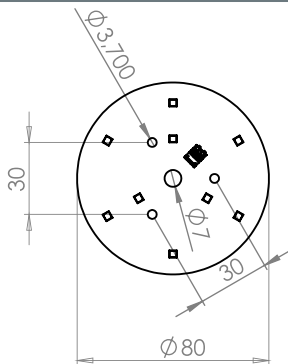

PCB-80-3030-9

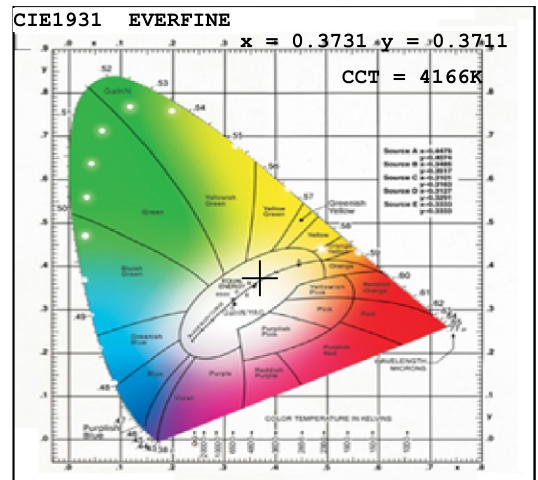

CIE1931 Chromaticity Diagram

