

ROUND 303600010


Constant Current R120-3030-20 LED Module
15 Watt

DESCRIPTION:

- Aluminium PCB design.
- High efficiency.
- Low energy consumption.
- Narrow colour tolerance.
- No UV or infrared radiation.
- 3 years warranty time.
- Certificates: CE, ROHs.

For Indoor and Outdoor Applications


High Efficiency Lighting and Automation Solutions

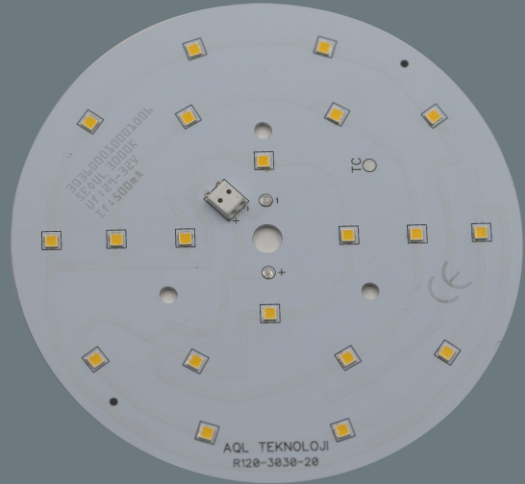


Module Dimensions	Size/Diameter	Material	Chip	LED	CRI	Serial	Parallel	Temperature Ambient Ta°C
R120-3030-20	Ø 120 mm	1.6 mm Alu	3030	20	≥80	5	4	-15°C+45°C

Code	Lumen Output			Voltage	CCT	Connection
	350mA	500mA	700mA			
303600010002009		1820 Lm		29....32 Volt	2700 Kelvin	wiring
303600010002001		1912 Lm		29....32 Volt	3000 Kelvin	wiring
303600010002002		1996 Lm		29....32 Volt	4000 Kelvin	wiring
303600010002003		2123 Lm		29....32 Volt	6500 Kelvin	wiring

TECHNICAL DRAWING

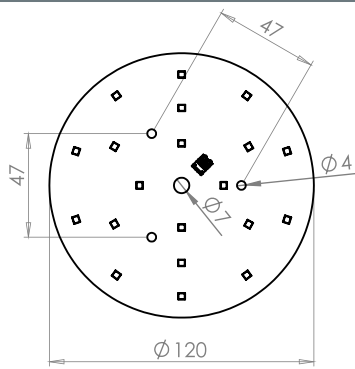

PCB-120-3030-20

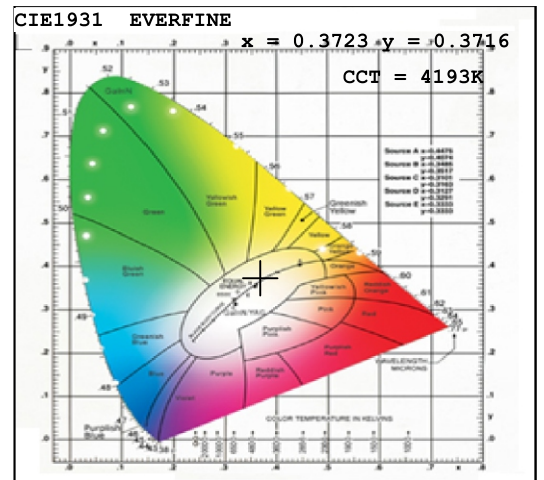

CIE1931 Chromaticity Diagram

