

LINEAR 303600009

Constant Current L24X560-5630-80 LED Module
18...20.9 Watt

DESCRIPTION:

- Aluminium PCB design.
- High efficiency.
- Low energy consumption.
- Narrow colour tolerance.
- No UV or infrared radiation.
- 3 years warranty time.
- Certificates: CE, ROHs.

For Indoor and Outdoor Applications



High Efficiency Lighting and Automation Solutions



Module Dimensions	Size/Diameter	Material	Chip	LED	CRI	Serial	Parallel	Temperature Ambient Ta°C
L24X560-5630-80	24X560 mm	1.6 mm Alu	5630	80	≥80	20	4	-15°C+45°C

Code	Lumen Output		Voltage	CCT	Connection
	300mA	350mA			
303600090002009	2445 Lm	2728 Lm	54...64 Volt	2700 Kelvin	wiring
303600090002002	2651 Lm	3009 Lm	54...64 Volt	4000 Kelvin	wiring
303600090002003	2739 Lm	3072 Lm	54...64 Volt	6500 Kelvin	wiring

TECHNICAL DRAWING

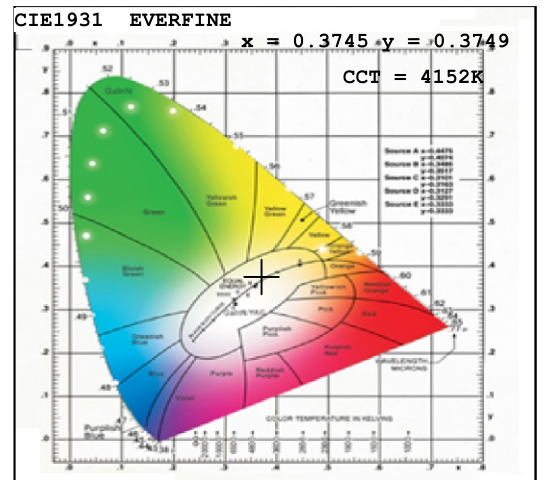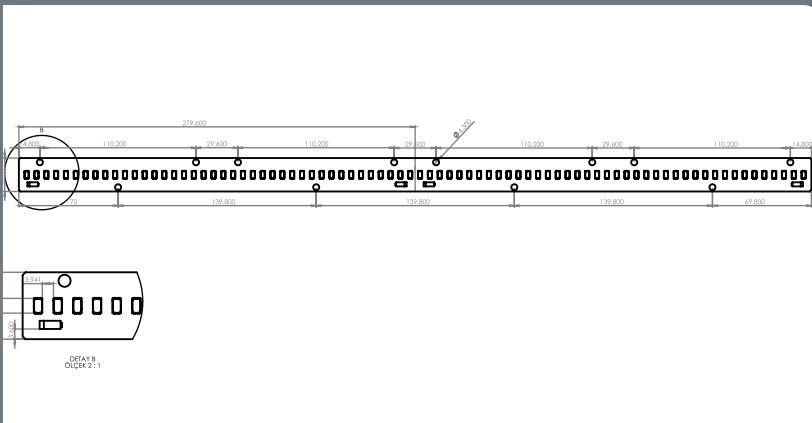

CIE1931 Chromaticity Diagram

