

Hi-GAS CANOPY Premium CLE


Canopy Light Engine

DESCRIPTION:

Ultra thin design.
High efficient LED and constant current driver.
Leading heat sink design.
No UV or infrared radiation, no danger of broken glass.
Low energy consumption, saves appr. 60% power comparing conventional HID lights.
Be equipped with short circuit, overload protection.
3 years warranty time.
Certificates: CE, ROHs.

Outdoor Application IP65

High Efficiency Lighting and Automation Solutions

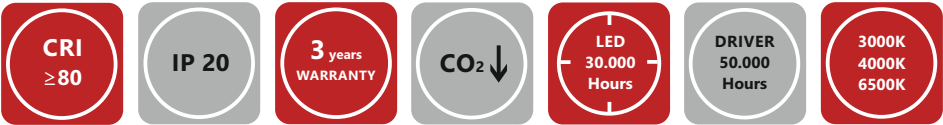

Article	Description	Lumen Output	System Power	Beam Angle	Body Color	Product Size	Package Qty.
104521002001***	LED CANOPY LIGHT CLASSIC AOK-80WiR	≥8000 Lm	80W	120°	White	242x400mm	5
104521002002***	LED CANOPY LIGHT CLASSIC AOK-120WiR	≥12000 Lm	120W	120°	White	321x400mm	5
104521002003***	LED CANOPY LIGHT CLASSIC AOK-160WiR	≥16000 Lm	160W	120°	White	400x400mm	5

Technical

High Efficient LED and Constant Current Driver
Input Voltage: AC 180-265V/AC 50/60Hz
Power Factor: >0.95
LED Type: SMD Chip with LM80 certificate
CRI: Ra≥80
Work temperature: -15°C+45°C
Material: Aluminum+PMMA

Options

DALI, Touch-DIM, 1-10V, DSI control
Corridor Function application
Compatible Emergency Conversion Kit
CRI: Ra>90

LED Color Selection table


for 3000K, Pls. specify 030 at order.
for 4000K, Pls. specify 040 at order.
for 6500K, Pls. specify 065 at order.

Certificate



AOK-80WiR : 352x194mm
AOK-120WiR: 352x273mm
AOK-160WiR: 352x352mm

Dimension



TECHNICAL NOTES:

Please contact us for different body colors or any special requests.
Please specify the colour temperatures of lighting, dotted the area in order.
Output of LED lighting flux current may vary ± 5%
Power consumption is approximately. Drivers and LED packets may vary according to the manufacturers value.

