


PALMIRA Premium LLE (Double Side)
LED Linear Light Engine

DESCRIPTION:

Ultra thin design.
High efficient constant current driver.
Leading heat sink design.
No UV or infrared radiation, no danger of broken glass.
Low energy consumption, saves appr. 60% power comparing conventional light.
Be equipped with short circuit, overload protection.
3 years warranty time.
Certificates: CE, ROHs

Indoor Recessed Application

High Efficiency Lighting and Automation Solutions

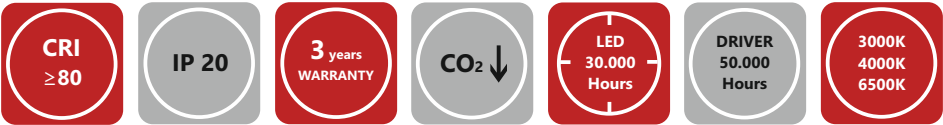

Article	Description	Lumen Output	System Power	Beam Angle	Body Color	Product Size	Package Qty.
401915011007***	LLE-05-0 PALMIRA PREMIUM L:900 mm	≥5920 Lm	50W	90°	Grey	L870*W90*H43mm	20
401915011008***	LLE-05-0 PALMIRA PREMIUM L:900 mm	≥8200 Lm	66W	90°	Gray	L870*W90*H43mm	20
401915011009***	LLE-05-0 PALMIRA PREMIUM L:1200 mm	≥7740 Lm	66W	90°	Gray	L1150*W90*H43mm	20
401915011010***	LLE-05-0 PALMIRA PREMIUM L:1200 mm	≥11750 Lm	90W	90°	Gray	L1150*W90*H43mm	20
401915011011***	LLE-05-0 PALMIRA PREMIUM L:1500 mm	≥8400 Lm	72W	90°	Gray	L1470*W90*H43mm	20
401915011012***	LLE-05-0 PALMIRA PREMIUM L:1500 mm	≥16800 Lm	135W	90°	Gray	L1470*W90*H43mm	20

Technical

Constant Current Driver with ENEC cetificate.
Input Voltage: AC 180-265V/AC 50/60Hz
Power Factor: >0.95
LED Type: SMD Chip with LM80 certificate
CRI: Ra≥80
Work temperature: -15°C+45°C
Material: Aluminum

Options

DALI, Touch-DIM, 1-10V, DSI control
Corridor Function application
Compatible Emergency Conversion Kit
Accessories: pendant equipment, mountain plate
Customised dimension


LED Color Selection table

for WW 3000K, Pls. specify 030 at order.
for NW 4000K, Pls. specify 040 at order.
for CW 6500K, Pls. specify 065 at order.

Certificate



Dimension



TECHNICAL NOTES:

Please contact us for different body colors or any special requests.
Please specify the colour temperatures of lighting, dotted the area in order.
Output of LED lighting flux current may vary ± 5%
Power consumption is approximately. Drivers and LED packets may vary according to the manufacturers value.

