



Hi-RACK Premium LLE Industry Linear Light Engine

DESCRIPTION:

Ultra thin design.
High efficient LED and constant current driver.
Leading heat sink design.
No UV or infrared radiation, no danger of broken glass.
Low energy consumption, saves appr. 60% power
comparing conventional HID lights.
Be equipped with short circuit, overload protection.
3 years warranty time.
Certificates: CE, ROHs.

Outdoor Application IP65

High Efficiency Lighting and Automation Solutions

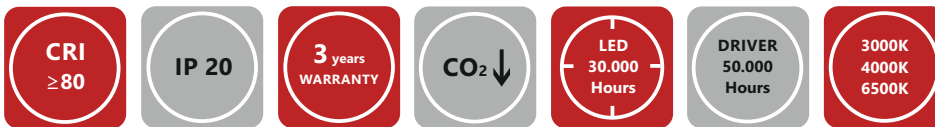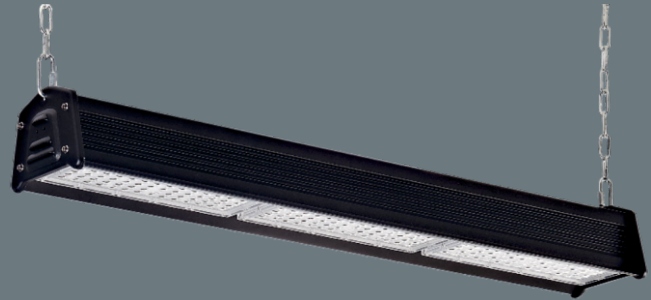

Article	Description	Lumen Output	System Power	Beam Angle	Body Color	Product Size	Package Qty.
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:600 mm 38W	≥4500 Lm	38W	90°	Black	624x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:600 mm 55W	≥6720 Lm	55W	90°	Black	624x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:900 mm 55W	≥6720 Lm	55W	90°	Black	919x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:900 mm 72W	≥8700 Lm	72W	90°	Black	919x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:900 mm 110W	≥13500 Lm	110W	90°	Black	919x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:1200 mm 110W	≥13500 Lm	110W	90°	Black	1214x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:1200 mm 67W	≥8950 Lm	67W	90°	Black	1214x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:1200 mm 135W	≥17900 Lm	135W	90°	Black	1214x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:1500 mm 110W	≥13400 Lm	110W	90°	Black	1509x142x112mm	10
404520001008***	HBL-01-0 Hi-RACK PREMIUM L:1500 mm 180W	≥22400 Lm	180W	90°	Black	1509x142x112mm	10

Technical

High Efficient LED and Constant Current Driver
Input Voltage: AC 180-265V/AC 50/60Hz
Power Factor: >0.95
LED Type: SMD Chip with LM80 certificate
CRI: Ra≥80
Work temperature: -15°C+45°C
Material: Aluminum+PMMA

Options

DALI, Touch-DIM, 1-10V, DSI control
Corridor Function application
Compatible Emergency Conversion Kit
CRI: Ra>90

LED Color Selection table

for 3000K, Pls. specify 030 at order.
for 4000K, Pls. specify 040 at order.
for 6500K, Pls. specify 065 at order.

Certificate




Dimension

Pls. see the next page.


TECHNICAL NOTES:

Please contact us for different body colors or any special requests.
Please specify the colour temperatures of lighting, dotted the area in order.
Output of LED lighting flux current may vary ± 5%
Power consumption is approximately. Drivers and LED packets may vary according to the manufacturers value.


TECHNICAL DOCUMENTS:

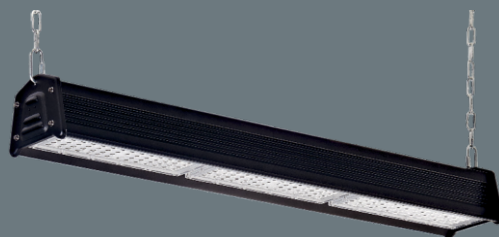

1. Fix the lamp to the bracket.

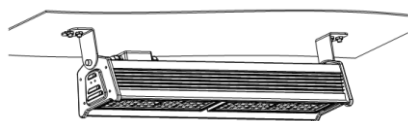

2. Rotate the lamp and connect exterior power wires.

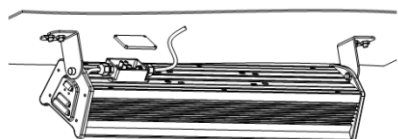


3. Rotate the lamp and connect exterior power wires.




The diagram illustrates the correct installation of a slipknot with a screw. It shows a chain being attached to a bracket. A circular inset provides a detailed view of the slipknot being inserted into the bracket. Another circular inset shows the slipknot being secured with a screw. The text "Slipknot with screw" is used to label the assembly in both insets.


DIMENSIONS:

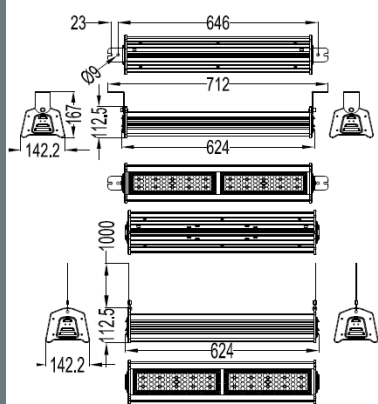


Hi-RACK PREMIUM L:600 mm

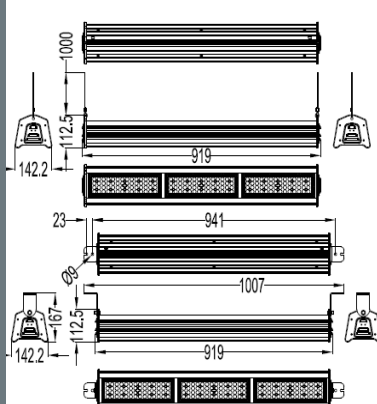

Hi-RACK PREMIUM L:900 mm

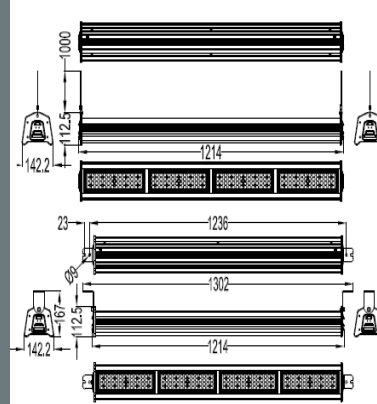

Hi-RACK PREMIUM L:1200 mm

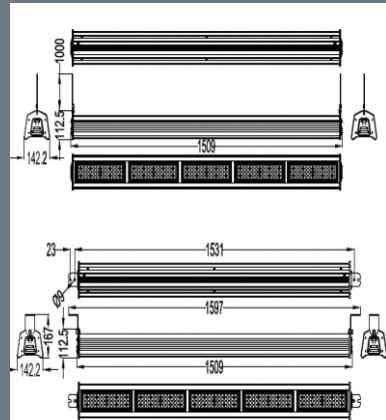

Hi-RACK PREMIUM L:1500 mm