TAURUS SQUARE Premium SLE

DownLight Engine

High Effiency Lighting and Automation Solutions

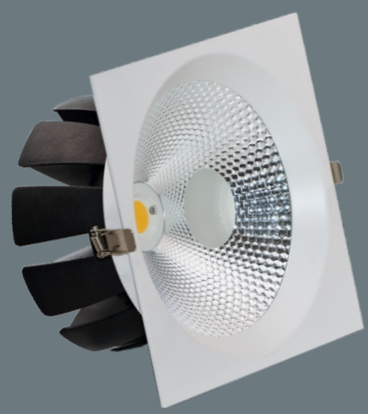

DESCRIPTION:

Perfectly suitable to replace traditional lights
Perfect heat reduction technology
Wide voltage range
The narrow colour tolerance
Quick wiring
Strong spring mechanism
3 years warranty time.
Certificates: CE, ROHs

Indoor Recessed Application

CRI ≥80 | IP 20 | 3 years WARRANTY | CO_2 ↓ | LED 30.000 Hours | DRIVER 50.000 Hours | 3000K 4000K 6500K

Article	Description	Lumen Output	System Power	Beam Angle	Body Color	Product Size	Package Qty.
404000007007***	DLS-001-0 TAURUS SQUARE PREMIUM 3''	1340 Lm	11.6W	90°	White	ø100x65x100mm	20
404000007008***	DLS-001-0 TAURUS SQUARE PREMIUM 4''	1560 Lm	13W	90°	White	ø115x75x115mm	20
404000007009***	DLS-001-0 TAURUS SQUARE PREMIUM 5''	2900 Lm	22W	90°	White	ø161x95x161mm	20
404000007003***	DLS-001-0 TAURUS SQUARE PREMIUM 6''	3800 Lm	30W	90°	White	ø196x110x196mm	10
404000007002***	DLS-001-0 TAURUS SQUARE PREMIUM 8''	4750 Lm	41W	90°	White	ø230x125x230mm	10

Technical

High Efficient Constant Current Driver
Input Voltage: AC180-250V AC 50/60Hz
Power Factor: >0.95
LED Type: Mid-power chip with LM80
CRI: Ra≥80
Work temperature: -15°C ....+45°C
Material: Aluminum

Options

DALI, Touch-DIM, 1-10V, DSI control
Corridor Function application
Compatible Emergency Conversion Kit
CRI: Ra>90

LED Color Selection table

for WW 3000K, Pls. specify 030 at order.
for NW 4000K, Pls. specify 040 at order.
for CW 6500K, Pls. specify 065 at order.

Certificate

RoHS COMPLIANT

CE

Dimension

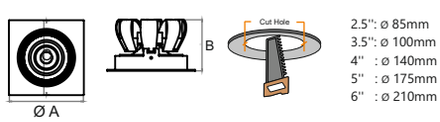

2.5'': ø 85mm
3.5'': ø 100mm
4'' : ø 140mm
5'' : ø 175mm
6'' : ø 210mm

TECHNICAL NOTES:
Please contact us for different body colors or any special requests.
Please specify the colour temperatures of lighting, dotted the area in order.
Output lighting flux of LED lamp and power consumption of drivers may vary ± 5% because of the manufacturers values.

idalux®
for a bright future